


FIELD (1 PER 1.3 FT²)

- ACTUAL ONE (1) FASTENER PER 1.23 SQUARE FEET
- TWENTY SIX (26) FASTENERS PER BOARD
- ENSURE FASTENER ENGAGES THE TOP FLANGE FOR STEEL DECK APPLICATIONS

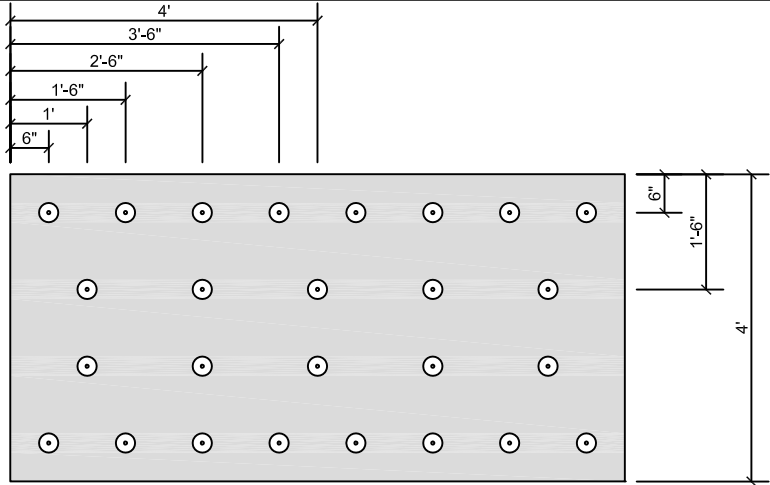

**PERIMETER
PRESCRIPTIVE ENHANCEMENT**

- PRESCRIPTIVE ENHANCEMENT WILL REQUIRE MORE THAN ONE (1) FASTENER PER 1 SQUARE FOOT
- ALTERNATE ATTACHMENT METHODS SHOULD BE CONSIDERED FOR PERIMETER ENHANCEMENTS SUCH AS MECHANICALLY ATTACHED MEMBRANE SYSTEMS
- CONTACT SOPREMA TECHNICAL SUPPORT FOR ADDITIONAL INFORMATION.

**CORNER
PRESCRIPTIVE ENHANCEMENT**

- ALTERNATE ATTACHMENT METHODS SHOULD BE CONSIDERED FOR CORNER ENHANCEMENTS SUCH AS MECHANICALLY ATTACHED BASE PLY SYSTEMS OR RIBBON ADHERED BOARDS FOR SOPREMA WARRANTY PURPOSES.
- CONSULT WITH SOPREMA TECHNICAL SUPPORT FOR FURTHER INFORMATION.

FASTENING PATTERNS AND ENHANCEMENTS SHOWN ARE FOR SOPREMA WARRANTY PURPOSES ONLY.



US CORPORATE ADDRESS
310 QUADRAL DRIVE
WADSWORTH, OHIO 44281
www.soprema.us
Tel:330.334.0066

PROJECT:

TITLE:

1 FASTENER PER 1.3 FT²,
4X8 BOARD FASTENING PATTERN

DRAWN BY: SOPREMA TECHNICAL SUPPORT, GGALLOWAY

NO.:

REVISION:

DATE:

DATE: 04.07.2014

SCALE: NTS

DRAWING NUMBER:
US.FP.04.10