



### FIELD (6)

- ONE (1) ROW FASTENED TO PURLIN AT 6" O.C.
- ENSURE INSULATION SYSTEM CONFORMS TO SUBSTRATE
- PRELIMINARY FASTEN INSULATION SYSTEM AS REQUIRED (NOT SHOWN FOR CLARITY)

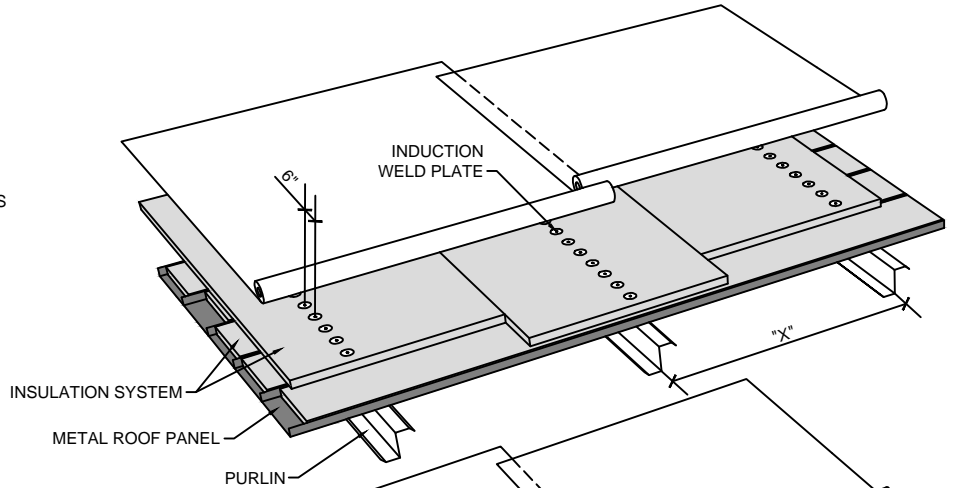

### PERIMETER PRESCRIPTIVE ENHANCEMENT

- ONE (1) ROW FASTENED TO PURLIN AT A MAXIMUM SPACING OF 3.6" O.C.
- ENSURE INSULATION SYSTEM CONFORMS TO SUBSTRATE
- PRELIMINARY FASTEN INSULATION SYSTEM AS REQUIRED (NOT SHOWN FOR CLARITY)
- IF THERE ARE ADDITIONAL PURLINS AT THE ROOF PERIMETER, ENHANCEMENTS MAY BE ACHIEVED BY ADDING ADDITIONAL ROWS OF FASTENERS. CONTACT SOPREMA TECHNICAL SUPPORT FOR ADDITIONAL INFORMATION.

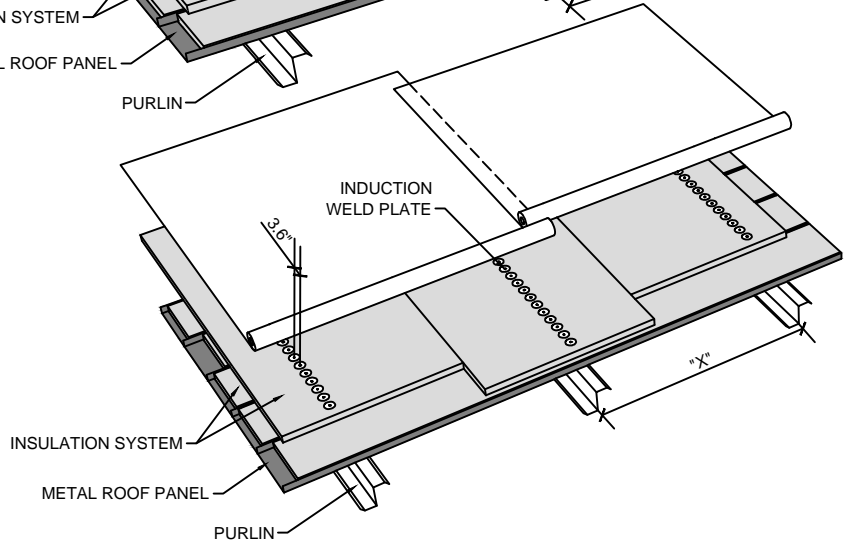

### CORNER PRESCRIPTIVE ENHANCEMENT

- PRESCRIPTIVE ENHANCEMENT WILL REQUIRE FASTENERS SPACED LESS THAN 3" O.C.
- ALTERNATE ATTACHMENT METHODS SHOULD BE CONSIDERED FOR CORNER ENHANCEMENTS. CONTACT SOPREMA TECHNICAL SUPPORT FOR ADDITIONAL INFORMATION.
- IF THERE ARE ADDITIONAL PURLINS AT THE ROOF CORNER, ENHANCEMENTS MAY BE ACHIEVED BY ADDING ADDITIONAL ROWS OF FASTENERS. CONTACT SOPREMA TECHNICAL SUPPORT FOR ADDITIONAL INFORMATION.

| Purlin Spacing (X) | Zone      | Fastener Spacing | Fasteners Per Square |
|--------------------|-----------|------------------|----------------------|
| 60in               | Field     | 6in              | 40                   |
|                    | Perimeter | 3.6in            | 67                   |
|                    | Corner    | n/a              | n/a                  |

FASTENING PATTERNS AND ENHANCEMENTS SHOWN ARE FOR SOPREMA WARRANTY PURPOSES ONLY.



US CORPORATE ADDRESS  
310 QUADRAL DRIVE  
WADSWORTH, OHIO 44281  
www.soprema.us  
Tel: 330.334.0066

PROJECT:

TITLE:

6IN O.C. INTO PURLINS,  
INDUCTION WELDED PVC,  
FASTENING PATTERN

DRAWN BY: SOPREMA TECHNICAL SUPPORT, GGALLOWAY

NO.:

REVISION:

DATE:

DATE: 2.3.2017

SCALE: NTS

DRAWING NUMBER:  
**US.FP.12.02**

USAGE OF THIS DETAIL IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAILS.  
PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.