




RELATED
PRODUCTS

FOUNDATIONS

SOPRABOARD®

ROOFING

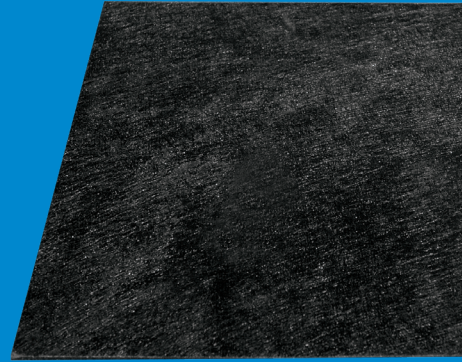

ASPHALTIC COVERBOARD / PROTECTION BOARD

SOPRABOARD	
THICKNESS	1/8" & 1/4"
WEIGHT	0.9 & 1.9 lb/ft²
BOARD SIZE	4x4, 4x5, 4x8

SOPRABOARD asphaltic coverboard is a semi-rigid roofing substrate board for use in multi-ply membrane and flashing assemblies and also serves as a protection board for waterproofing applications. SOPRABOARD is composed of a mineral fortified asphaltic core formed between two fiberglass reinforcing plies designed for compatibility with heat welded, cold-adhered, self-adhered or hot mopped assemblies. The performance characteristics of SOPRABOARD surpass the competition. See the chart below to learn more!

- Superior compressive strength vs competitive materials
- No need for priming in most applications
- Asphalt to asphalt compatibility results in some of the highest wind and fire rated assemblies over most decks; up to -525 lb/sq ft
- Lightweight for easier handling and cutting with less breakage

RELATED PRODUCTS

DUOTACK 365

Two-part polyurethane adhesive may be used for installing coverboards including SOPRABOARD

SOPRABOARD 1/8" OUTPERFORMS THE COMPETITION AT 1/4" & 1/2"

	SOPRABOARD, 1/8"	COMPETITOR A, 1/4"	COMPETITOR A, 1/2"	COMPETITOR B, 1/4"	COMPETITOR B, 1/2"
WEIGHT	0.9 lb/sq ft	1.2 lb/sq ft	2.0 lb/sq ft	1.5 lb/sq ft	2.7 lb/sq ft
SURFACING	Asphaltic saturated fiberglass	Fiberglass mat w/non-asphaltic coating	Fiberglass mat w/non-asphaltic coating	Fiberglass mat	Fiberglass mat
WATER ABSORPTION	<1.0%	5%	5%	10%	10%
COMPRESSIVE STRENGTH	1610 psi	900 psi	900 psi	1800 psi	1800 psi
COST	\$\$	\$\$\$	\$\$\$\$	\$\$\$	\$\$\$\$



SOPREMA.US • 1.800.356.3521

SOPREMA.CA • 1.877.MAMMOUTH

INSTALLATION INSTRUCTIONS

1



Place SOPRABOARD in desired position.

2



Adhere SOPRABOARD with mechanical fasteners, DUOTACK 365 insulation adhesive, or hot asphalt. Refer to the SBS Roofing Manual for additional application guidelines.

3



Subsequent base ply membranes are adhered via heat-welding, cold adhesive, self-adhesive or hot asphalt applications.

If you have any questions about this product or its installation, please contact your SOPREMA representative.



SOPREMA.US • 1.800.356.3521

SOPREMA.CA • 877.MAMMOUTH

SS10060 - REV.0618