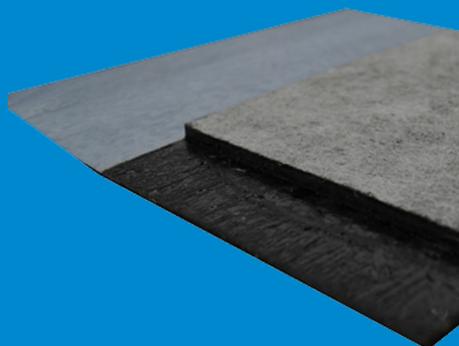




WATERPROOFING

SOPRASMART®

ROOFING



SBS MODIFIED BITUMEN LAMINATED COVERBOARDS



The SOPRASMART® Laminated Boards Family includes products whose characteristics, due to SOPREMA's exclusive lamination technology, are synonymous with speed, quality, durability and efficiency. With the roof membrane and cover board combined, installers gain valuable time and labor savings. These laminated roof membranes are manufactured in a controlled environment for consistency with a variety of cover board options including SOPRABOARD®, polyisocyanurate insulation board and high density rock wool (XP) resulting in labor and time savings with easy jobsite installation.

- Fast, labor-saving installation
- Rugged SBS base ply laminated to various roof cover boards
- Proprietary and proven factory controlled bonding technology
- Total adhesion of the membrane to the support panel

RELATED PRODUCTS

DUOTACK 365 ADHESIVE

Two-part polyurethane adhesive may be used for installing SOPRASMART laminated boards

DUO-SELVEDGE TECHNOLOGY

Patented DUO-SELVEDGE TECHNOLOGY provides safe and waterproof attachment





- Protects the system components beneath the base ply during heat welding
- Immediately bonded
- Partially self-adhered lap (60% of the side lap) leaving only 40% to be heat welded
- Provides proven waterproof protection of heat welded seams



SOPREMA.US • 1.800.356.3521

SOPREMA.CA • 1.877.MAMMOUTH

SOPRASMA LAMINATED BOARDS FAMILY

SYSTEMS	SOPRASMA BOARD 180	SOPRASMA ISO HD 180	SOPRASMA XP HD 180	SOPRASMA XP ISO 180	SOPRASMA BOARD 180 ISO
IMAGES					
SIZES	3'x8'	3'x8'	3'x8' or 3'x16'	3'x8' or 3'x16'	3'x16'
PRODUCT OPTIONS	SOPRABOARD laminated with an SBS-modified bitumen polyester reinforced base ply in flam or sanded variations	High density ISO with an SBS-modified bitumen polyester reinforced base ply in flam or sanded variations	HD SOPRAROCK with an SBS-modified bitumen polyester reinforced base ply in flam or sanded variations	ISO with HD SOPRAROCK and an SBS-modified bitumen polyester reinforced base ply in flam or sanded variations	SOPRABOARD laminated with an SBS-modified bitumen polyester reinforced base ply in flam or sanded variations in addition to 2" of SOPRA-ISO

INSTALLATION INSTRUCTIONS

1



Place SOPRASMA system in desired position.

2



Adhere SOPRASMA system with mechanical fasteners, DUOTACK 365 insulation adhesive, or hot asphalt.

3



Roll self-adhered portion of Duo Selvedge side lap and then heat weld remaining 60%. Apply SOPRALAP cover strip over all end laps.

4



Subsequent membranes are adhered via heat-welding, cold adhesive, self-adhesive or hot asphalt applications.

If you have any questions about this product or its installation, please contact your SOPREMA representative.

